


Simplicity®

9/21/64

LIGHT KIT Mfr's No. 454

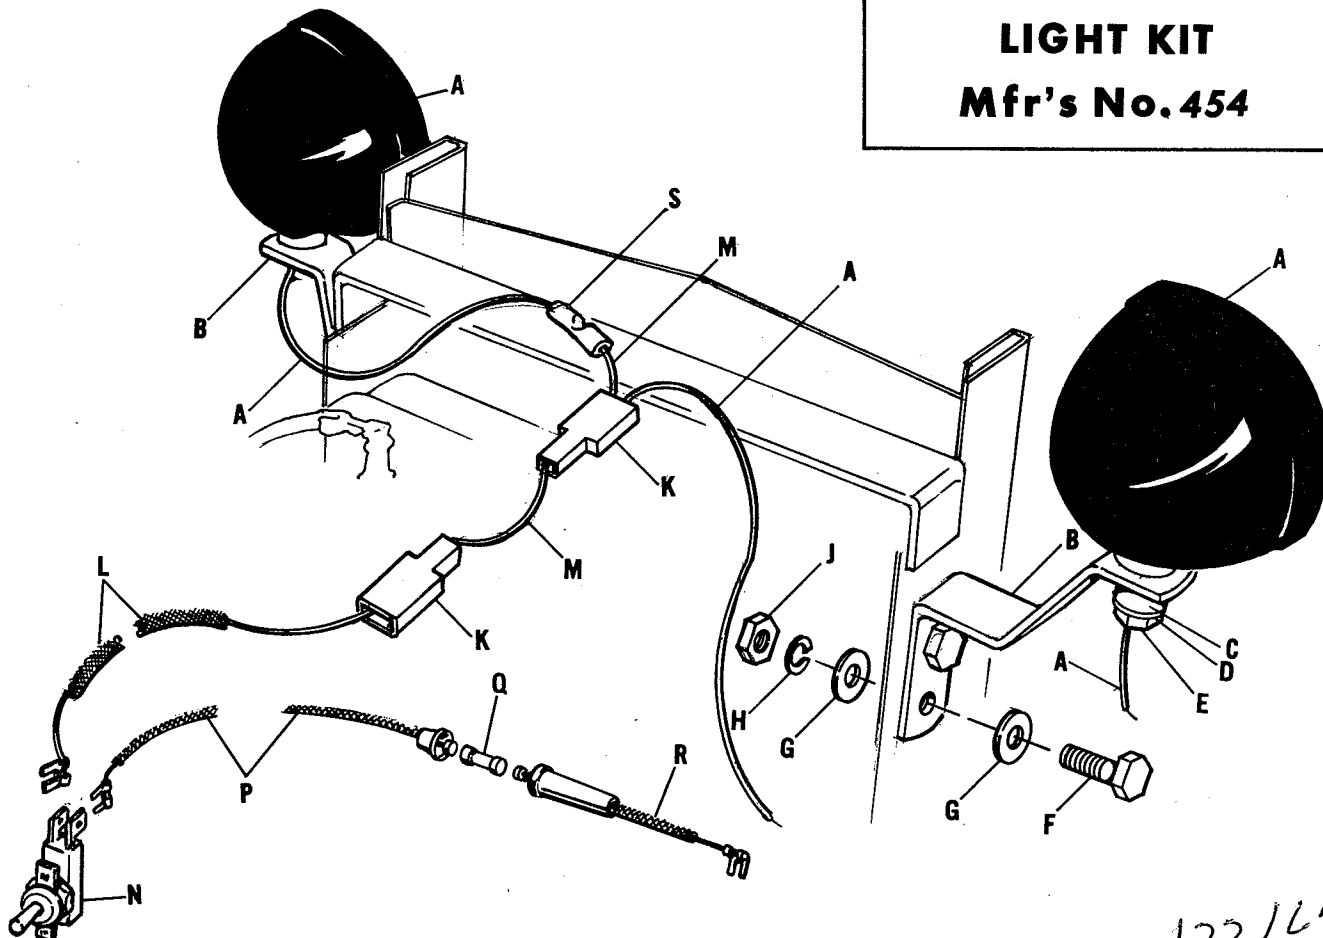

1. Remove Hood and Battery.
2. Remove white plastic plug button from 1/2" hole on the dash board and install toggle switch 122184.

3. Before beginning to install the light kit, study the above illustration and identify all of the parts. Attach the light support brackets (2) 122194 with 705018 cap-screws, 720001 lockwashers, 719002 plain washers and 717001 hex nuts. The bottom hole of the light support bracket 122194 will have 2 plain washers 719002, one under the head of the capscrew and the other between the lockwasher and the grill support.

4. Remove all paint from the immediate area around the two lamp mounting holes on the light support and mount the lamps to the support with a spacer between the lamp support and nut. Fasten securely with a 1/2"-13 hex nut and lockwasher.

5. Attach the terminals of the lamp wires to the connector. Attach the extension wire (122185) between the two connectors. Remove the wire clamp near the front left corner of the gas tank and install the clamp (122186) furnished with the light kit. Install the wire (122176) from the connector, through the wire clamp and around the gas tank to the toggle switch (122184).

Sealed beam 122164

Ref. Let.	Part No.	Description
A	122175	Lamp Assembly
B	122194	Bracket
C	122053	Spacer
D	720004	Lock Washer, 1/2"
E	717006	Full Hex. Nut, 1/2"-13
F	705018	Hex. Cap Screw, 5/16"-18 x 1-1/2"
G	719002	Plain Washer 5/16"
H	720001	Lock Washer, 5/16"
J	717001	Full Hex. Nut, 5/16"-18
K	122182	Insulated Connector
L	122176	Wire (switch to connector)
M	122185	Extension Wire
N	122184	Toggle Switch (with hardware)
P	122178	Wire (fuse to switch)
Q	122172	Fuse 20 Amp.
R	122177	Wire (fuse to voltage reg.)
S	122157	Connector

OVER

SIMPLICITY MANUFACTURING COMPANY, INC.

PRINTED IN U.S.A.

